

	CROSS Country	TRAIL	ALL Mountain	ENDURO	FREERIDE	E-MTB	ROAD	GRAVEL	CYCLO- CROSS	TOURING	URBAN	TIME-TRIAL Triathlon	Cargo
ш													
RACE				Attack-XR								Triva	
_		Arc-S			<u> </u>								
SPORT				Attack-S									
SP				Atta	ck-XS								
										Attack	-S (FM)		
UNIVERSAL		Arc-U											
Æ				Attack-U									
Z				Attao	CK-XU					Arc-U			
						Attack-E				Attack	-U (FM)		Cargo
						Attack-XE							Cargo-X
OTHER						Arc-E							Cargo-Duo
01									Mcx-2 FM/PM				3

RACE

Outstanding performance with reduced weight and maximum stopping power in harsh terrain.

SPORT

Features improved adjustability with consistent power in all conditions.

UNIVERSA

Suitable for all riders, these brakes offer high performance at an attractive price.





SERIES TECH



FEATURES

Compact design with dual bladders for ambidextrous use and easy bleeding. Large 24mm pistons provide outstanding power and control while the high quality finish improves the appearance of any bike.

SYSTEM

Open System



EXCELLENT PERFORMANCE IN COMPAT DESIGN



Arc Series

SPECIFICATIONS

MODELS	Arc-S	Arc-U
MOUNT TYPE	Post Mount	Post Mount
LEVER MATERIAL	Forged Aluminium	Forged Aluminium
LEVER BLADE	2 Finger Forged	2 Finger Alloy Stamping
ADJUSTMENT	Tool-free	Tooled
PISTON	2	2
HOSE JOINT	Inline	Inline
BRAKE HOSE COLOR	Black	Black
LOADING DIRECTION	Top Loading	Top Loading
SYSTEM	Open System	Open System
PAD	Heat Dissipation Semi-Metallic	Semi-Metallic
FLUID	Riderever Mineral	Riderever Mineral
FINISH	Black	Black
AVERAGE WEIGHT	225g	230g

10

sport / Arc-S



Outstanding power, control, and adjustability in all conditions.

LEVER:

- ▶ 2 Finger Forged Lever Blade
- ► Forged Lever body
- ▶ Tool-free Reach Adjust
- ▶ I-Spec II Compatible
- ▶ Finish:Anodise Black



- ▶ 2-Pison Forged Alloy
- ▶ Heat Dissipation Cover
- ► Semi-Metallic Brake Pad (Compatible with Shimano G type)
- ▶ Finish: Anodise Black
- ▶ Weight: 225g

universal / Arc-U



Forged aluminum body and 2-finger lever blade is a great choice for all-around mountain braking.

LEVER:

- ▶ 2 Finger Stamping Lever Blade
- ▶ Forged Lever body
- ▶ Tooled Reach Adjust
- ▶ I-Spec II Compatible
- ▶ Finish: Anodise Black



- ▶ 2-Piston Forged Alloy
- ► Semi-Metallic Brake Pad (Compatible with Shimano G type)
- ▶ Finish: Anodise Black
- ▶ Weight: 230g



SERIES TECH

FEATURES


The muscular and modern lever design delivered simple, powerful stopping force for all types of riders and trails. The Hinged clamp and discrete design are easy to assemble install on the handlebar.

SYSTEM

Open System

FLUID Mineral Oil I Spec B Compatible **Hinged Clamp** 2 Finger Lever Blade Forged Aluminium Body

EXCELLENCE CLAMPING FORCE AND PERFORMANCE DESIGN

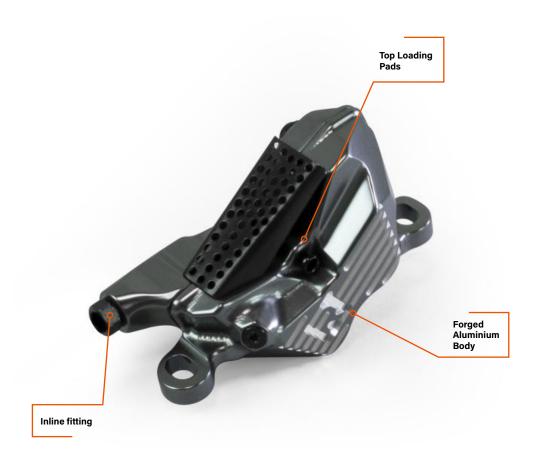

SPECIFICATIONS

Attack Series

MODELS	Attack-XR	Attack-XS	Attack-XU	Attack-S	Attack-U
MOUNT TYPE	Post Mount	Post Mount	Post Mount	Post Mount	Post Mount
LEVER MATERIAL	Forged Aluminium	Forged Aluminium	Forged Aluminium	Forged Aluminium	Forged Aluminium
LEVER BLADE	2 Finger Forged	2 Finger Forged	2 Finger Alloy Stamping	2 Finger Forged	2 Finger Alloy Stamping
ADJUSTMENT	Tool-free	Tool-free	Tooled	Tool-free	Tooled
PISTON	4	4	4	2	2
HOSE JOINT	Inline	Inline	Inline	Inline	Inline
BRAKE HOSE COLOR	Black	Black	Black	Black	Black
LOADING DIRECTION	Top Loading	Top Loading	Top Loading	Top Loading	Top Loading
SYSTEM	Open System	Open System	Open System	Open System	Open System
PAD	Heat Dissipation Semi-Metallic	Sintered	Semi-Metallic	Heat Dissipation Semi-Metallic	Semi-Metallic
FLUID	Riderever Mineral	Riderever Mineral	Riderever Mineral	Riderever Mineral	Riderever Mineral
FINISH	Galaxy Grey	Black	Black	Black	Black
AVERAGE WEIGHT	286g	298g	290g	255g	260g

race / Attack-XR



4-Pistons caliper in excellent power and modulation. Offered in our unique galaxy gray finish.

LEVER:

- ▶ 2 Finger Forged Lever Blade
- ▶ Forged Lever Body
- ▶ Tool-free Reach Adjust
- ▶ I-Spec B Compatible
- ▶ Finish: Galaxy Grey



- ▶ 4-Piston Forged Alloy
- ▶ Heat Dissipation Cover
- ► Semi-Metallic Brake Pad (Compatible with Shimano D type)
- ▶ Finish: Galaxy Grey
- ▶ Weight: 286g

sport / Attack-XS



Forged aluminum lever and sintered pads provide consistent performance in all conditions.

LEVER:

- ▶ 2 Finger Forged Lever Blade
- ▶ Forged Lever Body
- ▶ Tool-free Reach Adjust
- ▶ I-Spec B Compatible
- ▶ Finish: Anodise Black



- ▶ 4-Piston Forged Alloy
- ► Sintered Brake Pad (Compatible with Shimano D type)
- ▶ Finish: Anodise Black
- ▶ Weight: 298g

universal / Attack-XU



4-Piston braking control at an attractive price.

LEVER:

- ▶ 2 Finger Alloy Stamping Lever Blade
- ► Forged Lever body
- ▶ Tooled Reach Adjust
- ▶ I-Spec B Compatible
- ▶ Finish: Anodise Black



- ▶ 4-Piston Forged Alloy
- ► Semi-Metallic Brake Pad (Compatible with Shimano D type)
- ▶ Finish: Anodise Black
- ▶ Weight: 290g

sport / Attack-S



Heat Dissipation brake pads and forged aluminum lever offer improved performance.

LEVER:

- ▶ 2 Finger Forged Lever Blade
- ▶ Forged Lever Body
- ▶ Tool-free Reach Adjust
- ▶ I-Spec B Compatible
- ▶ Finish: Anodise Black



- ▶ 2-Piston forged alloy
- ▶ Heat Dissipation Cover
- ► Semi-Metallic Brake Pad (Compatible with Shimano G type)
- ▶ Finish: Anodise Black
- ▶ Weight: 255g

universal / Attack-U



This entry level and reliable brake is designed to fit all riders.

LEVER:

- ▶ 2 Finger Alloy Stamping Lever Blade
- ▶ Forged Lever body
- ▶ Tooled Reach Adjust
- ▶ I-Spec B Compatible
- ▶ Finish: Anodise Black



- ▶ 2-Piston Forged Alloy
- ► Semi-Metallic Brake Pad (Compatible with Shimano G type)
- ▶ Finish: Anodise Black
- ▶ Weight: 260g



E-Bike Series

SPECIFICATIONS

MODELS	Arc-E	Attack-XE	Attack-E
MOUNT TYPE	Post Mount	Post Mount	Post Mount
LEVER MATERIAL	Forged Aluminium (Ball End)	Forged Aluminium (Ball End)	Forged Aluminium (Ball End)
LEVER BLADE	2 Finger Forged	2 & 3 Finger Forged	2 & 3 Finger Forged
SENSOR CONTROL	W/	W/	W/
ADJUSTMENT	Tooled	Tooled	Tooled
PISTON	2	4	2
PISTON DI.	24 mm	16/16 mm	24 mm
HOSE JOINT	Inline	Inline & Banjo bolt	Inline
BRAKE HOSE COLOR	Black	Black	Black
LOADING DIRECTION	Top Loading	Top Loading	Top Loading
SYSTEM	Open System	Open System	Open System
PAD	Heat Dissipation Semi-Metallic	Sintered	Heat Dissipation Semi-Metallic
FLUID	Riderever Mineral	Riderever Mineral	Riderever Mineral
FINISH	Black	Black	Black
AVERAGE WEIGHT	228g	298g	257g

Arc-E



Enjoy the sense of speed along with a sense of security.

LEVER:

- ▶ 2 Finger Forged Blade (Ball end)
- ▶ Forged Lever body
- ▶ Tooled Reach Adjust
- ▶ I-Spec II Compatible
- ▶ Standard Wire Length: 200 & 500mm
- ▶ Reed Sensor (Power off) Available
- ▶ Finish: Anodise Black



- ▶ 2-Piston Forged Alloy
- ▶ Heat Dissipation Cover
- ► Semi-Metallic Brake Pad (Compatible with Shimano G type)
- ▶ Top Loading
- ▶ Inline Fitting
- ▶ Finish: Anodise Black
- ▶ Weight: 228g

Attack-XE

SYSTEM

Open System



High braking performance also available for E-bike.

LEVER:

- ▶ 2 & 3 Finger Forged Lever Blade(Ball End)
- ▶ Forged Lever body
- ▶ Tooled Reach Adjust
- ▶ I-Spec B Compatible
- ▶ Reed Sensor
- ▶ Standard Wire Length: 200 & 500mm
- ▶ Finish: Anodise Black

- ▶ 4-Piston Forged Alloy
- ▶ Sintered Brake Pad
- (Compatible with Shimano D type)
- ▶ Top Loading
- ▶ Inline & Banjo
- ▶ Finish: Anodise Black
- ▶ Weight: 298g

Attack-E



Attack version with Sensor Control Design.

LEVER:

- ▶ 2 & 3 Finger Forged Lever Blade(Ball End)
- ▶ Forged Lever body
- ▶ Tooled Reach Adjust
- ▶ I-Spec B Compatible
- ▶ Reed Sensor
- ▶ Standard Wire Length: 200 & 500mm
- ▶ Finish: Anodise Black



- ▶ 2-Piston Forged Alloy
- ▶ Heat Dissipation Cover
- ► Semi-Metallic Brake Pad (Compatible with Shimano G type)
- ▶ Top Loading
- ▶ Inline Fitting
- ▶ Finish: Anodise Black
- ▶ Weight: 257g



SPECIFICATIONS

Cargo Bike Brake

MODELS	Cargo / Cargo E	Cargo-XT; Cargo-XTE	Cargo-Duo / Cargo-DE Cargo-DXT / Cargo-DXTE
MOUNT TYPE	Post Mount	Post Mount	Post Mount
LEVER MATERIAL	Forged Aluminum(Ball end)	Forged Aluminum(Ball end)	Forged Aluminum(Ball end)
LEVER BLADE	3 Finger Forged	3 Finger Forged	3 Finger Forged
SENSOR CONTROL	Option	Option	Option
ADJUSTMENT	Tooled	Tooled	Tooled
PISTON	2	4	2 & 4
CALIPER	For 1.8mm Rotor	For 2.3mm Rotor	For 1.8mm Rotor(2 piston) For 2.3mm Rotor(4 piston)
HOSE JOINT	Inline Bolt	Inline & Banjo Bolt	Inline & Banjo Bolt
BRAKE HOSE COLOR	Black	Black	Black
LOADING DIRECTION	Top Loading	Top Loading	Top Loading
SYSTEM	Open System	Open System	Open System
PAD	Semi-Metallic Brake Pad	Semi-Metallic Brake Pad	Semi-Metallic Brake Pad
FLUID	Riderever Mineral	Riderever Mineral	Riderever Mineral
FINISH	Black	Black	Black

Cargo / Cargo E

SYSTEM

Open System

FLUID

Mineral Oil



Same and the same

Powerful choice for limited mounting space.

LEVER:

- ▶ 3 Finger Forged Lever Blade(Ball End)
- ▶ Forged Lever body
- ▶ Tooled Reach Adjust
- ▶ Lock Device (option)
- ▶ Finish: Anodise Black

Cargo-E:

- ▶ Reed Sensor w wire (option)
- ▶ Standard Wire Length: 200 & 500mm

- ▶ 2-Piston Forged Caliper (For 1.8mm Rotor)
- ► Semi-Metallic Brake Pad (Compatible with Shimano G type)
- ▶ Top Loading
- ▶ Inline Bolt
- ▶ Finish: Anodise Black

Cargo-XT/Cargo-XTE

SYSTEM

Open System

FLUID

Mineral Oil



Powerful, stable brake performance for heavy loading bikes.

LEVER:

- ▶ 3 Finger Forged Lever Blade(Ball End)
- ▶ Forged Lever body
- ▶ Tooled Reach Adjust
- ▶ Finish: Anodise Black

Cargo-XTE:

- ▶ Reed Sensor w wire (option)
- ▶ Standard Wire Length: 200 & 500mm



- ▶ 4-Piston Forged Caliper(For 2.3mm Rotor)
- ► Semi-Metallic Thicker Brake Pad (Compatible with Shimano D type)
- ▶ Top Loading
- ▶ Inline or Banjo
- ► Finish: Anodise Black

Cargo-Duo / Cargo-DE

SYSTEM

Open System

FLUID
Mineral Oil

RIDEREVAR

ORIDEREVAR

For tricycles, duo calipers with excellent braking force.

LEVER:

- ▶ 3 Finger Forged Lever Blade (Ball End)
- ▶ Forged Lever Body
- ▶ Tooled Reach Adjust
- ▶ Lock Device (option)
- ▶ Finish:Anodise Black

Cargo-DE:

- ▶ Reed Sensor w wire (option)
- ▶ Standard Wire Length: 200 & 500mm

- ▶ 2-Piston Forged Standard & Mirrored Caliper (For 1.8mm Rotor)
- ► Semi-Metallic Brake Pad (Compatible with Shimano G type)
- ▶ Top Loading
- ▶ Inline Bolt
- ▶ Finish: Anodise Black

Cargo-DXT/ Cargo-DXTE

SYSTEM

Open System



For tricycles, duo calipers with excellent braking force.


LEVER:

- ▶ 3 Finger Forged Lever Blade (Ball End)
- ► Forged Lever Body
- ▶ Tooled Reach Adjust
- ▶ Lock Device (option)
- ▶ Finish:Anodise Black

Cargo-DXTE:

- ▶ Reed Sensor w wire (option)
- ▶ Standard Wire Length: 200 & 500mm

- ► 4-Piston Forged Standard & Mirrored Caliper (For 2.3mm Rotor)
- ► Semi-Metallic Thicker Brake Pad (Compatible with Shimano D type)
- ▶ Top Loading
- ▶ Inline or Banjo
- ▶ Finish: Anodise Black

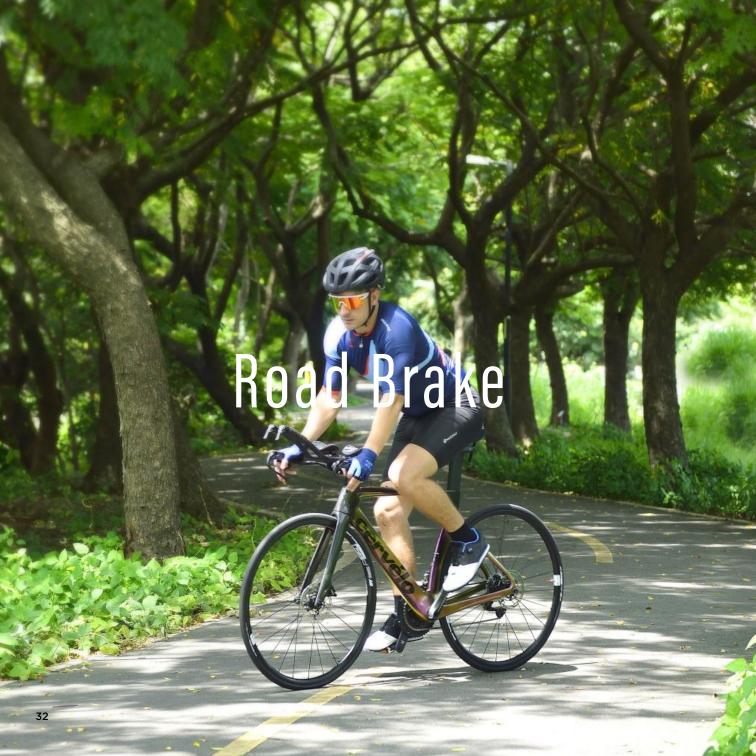

Attack / Arc (FM) / Triva SPECIFICATIONS

MODELS	Attack-S (FM)	Attack-U (FM)	Arc-U (FM)
MOUNT TYPE	Flat Mount	Flat Mount	Flat Mount
LEVER MATERIAL	Forged Aluminium	Forged Aluminium	Forged Aluminium
LEVER BLADE	2 Finger Forged	2 Finger Alloy Stamping	2 Finger Alloy Stamping
ADJUSTMENT	Tool-free	Tooled	Tooled
PISTON	2	2	2
HOSE JOINT	Inline	Inline	Inline
BRAKE HOSE COLOR	Black	Black	Black
LOADING DIRECTION	Top Loading	Top Loading	Top Loading
SYSTEM	Open System	Open System	Open System
PAD	Heat Dissipation Semi-Metallic	Semi-Metallic	Semi-Metallic
FLUID	Riderever Mineral	Riderever Mineral	Riderever Mineral
FINISH	Black	Black	Black
AVERAGE WEIGHT	261g	265g	265g

MODELS	Triva		
MOUNT TYPE	Flat Mount		
LEVER MATERIAL	Forged Aluminium		
ADJUSTMENT	Tooled		
PISTON	2		
Di2 Remote Assembly	Option		
HOSE JOINT	Inline		
BRAKE HOSE COLOR	Black		
LOADING DIRECTION	Top Loading		
SYSTEM	Open System		
PAD	Semi-Metallic Brake Pad		
FLUID	Riderever Mineral		
FINISH	Black		
AVERAGE WEIGHT	279g		

sport / Attack-S (FM)



Our Attack-S brake is now also available as a flatmount version to fit modern road frames.

LEVER:

- ▶ 2 Finger Forged Lever Blade
- ▶ Forged Lever body
- ▶ Tool-free Reach Adjust
- ▶ I-Spec B Compatible
- ▶ Finish: Anodise Black



- ▶ 2-Piston Forged Alloy
- ▶ Heat Dissipation Cover
- ► Semi-Metallic Brake Pad or Elite Cooling Pad (Compatible with Shimano K type)
- ▶ Finish: Anodise Black
- ▶ Weight: 261g

universal / Attack-U (FM)



Our Attack-U brake is now also available as a flatmount version to fit modern road frames.

LEVER:

- ▶ 2 Finger Alloy Stamping Lever Blade
- ▶ Forged Lever body
- ▶ Tooled Reach Adjust
- ▶ Finish: Anodise Black



- ▶ 2-Piston Forged Alloy
- ► Semi-Metallic Brake Pad (Compatible with Shimano K type)
- ▶ Finish: Anodise Black
- ▶ Weight: 265g

universal / Arc-U (FM)



Our Arc-U brake is now also available as a flatmount version to fit modern road frames.

LEVER:

- ▶ 2 Finger Alloy Stamping Lever Blade
- ▶ Forged Lever body
- ▶ Tooled Reach Adjust
- ▶ Finish: Anodise Black



- ▶ 2-Piston Forged Alloy
- ► Semi-Metallic Brake Pad (Compatible with Shimano K type)
- ▶ Finish: Anodise Black
- ▶ Weight: 265g

Race / Triva





Aero dynamic, comfort levers. Allows easy Di2 upgrade by adding switch port accessory.

LEVER:

- ▶ Forged Lever Blade(Option: Carbon)
- ▶ Forged Lever Body
- ► Flexible Mounting ID (19~20.5mm)
- ▶ Di2 (SW-R9150) switch port(option)
- ▶ Tooled Reach Adjust
- ▶ Finish: Anodise Black

CALIPER:

- ▶ 2-Piston Forged Alloy
- ▶ Flat Mount
- ► Semi-Metallic Brake Pad or Elite Cooling Pad

(Compatible with Shimano K type)

- ▶ Finish: Anodise Black
- ► Weight: 289g(Carbon Lever 279g)

MCX-2

Dual-piston design offers precise power and modulation. Available for post mount and flat mount bikes, they are highly adjustable for easy setup.

MODELS	MCX-2 (FM)	MCX-2 (PM)
MOUNT TYPE	Flat Mount	Post Mount
CALIPER	Melt Forged	Melt Forged
PISTON	2	2
COLOR	Black	Black
CALIPER FIXING BOLT	T25	T25
PAD	Heat Dissipation Organic	Heat Dissipation Organic
AVERAGE WEIGHT	160	170
	Options	
CABLE	JAGWIRE PCK200-PCK209	JAGWIRE PCK400-PCK409



MCX-2 (FM)

- ▶ Melt-Forged
- ▶ Flat Mount
- ▶ Dual Piston
- ▶ 2-Piece Actuator Arm
- ▶ Spring Loading Adjustment
- ▶ Pad Adjustment
- ► Heat Dissipation Brake Pad (Compatible with Shimano K type)
- ▶ Includes Inline Adjuster
- ▶ Weight: 160 g



MCX-2 (PM)

- ▶ Melt-Forged
- ▶ Post Mount
- ▶ Dual Piston
- ▶ 2-Piece Actuator Arm
- ▶ Spring Loading Adjustment
- ▶ Pad Adjustment
- ▶ Heat Dissipation Brake Pad (Compatible with ShimanoG type)
- ▶ Includes Inline Adjuster
- ▶ Weight: 170 g



Brake Pads

Heat Dissipation series

- ▶ Organic brake pad
- ▶ Cooling efficient
- ▶ Rock protective
- ▶ Reusable cover
- Excellent performance in dry conditions
- Low noise





HCO4S

Specification:

- ► Post Mount 4 piston (Compatible with Shimano H type)
- ► Fit for Shimano system: M9210/M820/M8120/M8020/ M7120/M640/MT520/MT420



HA02S

Specification:

- ► Post Mount (Compatible with Shimano J type)
- ► Fit for Shimano system: M9020/M9000/M985/M8000



HB02S

Specification:

- ► Flat Mount (Compatible with Shimano L type)
- ► Fit for Shimano system: BR-R9170/BR- RS805/BR-RS505/ BR-RS405/BR- RS3305

Easy Grab series

- ▶ Semi-Metallic brake pad
- ▶ Easy maintenance
- ▶ Better abrasion durability
- Great choice for normal climate
- Low noise



PA01S

Specification:

- ▶ Post Mount (Compatible with Shimano G/J type)
- ► Fit for Shimano system: M9020/M9000/M985/M8000



PB01S

Specification:

- ▶ Flat Mount
- (Compatible with Shimano K/L type)
- ► Fit for Shimano system: BR-R9170/BR- RS805/BR-RS505/

Brake Rotors

Pro Disc Brake Rotors

RS05A



Hub/Brake Compatibility : 6-Bolt Disc					
Rotor Size	Weight	Rotor Thickness			
140mm	109 g	1.8 mm			
160mm	125 g	1.8 mm			
180mm	151 g	1.8 mm			
203mm	175 g	1.8 mm			
220mm	208 g	2.0 mm			



RS05B

Hub/Brake Compatibility : Centerlock Disc			
Rotor Size	Weight	Rotor Thickness	
140mm	122 g	1.8 mm	
160mm	137 g	1.8 mm	
180mm	163 g	1.8 mm	
203mm	187 g	1.8 mm	
220mm	230 g	2.0 mm	

Pro Disc Brake Rotors with Magnet

RS05A-E



Hub/Brake Compatibility : 6-Bolt Disc				
Rotor Size	Weight	Rotor Thickness		
160mm	119 g	1.8 mm		
180mm	154 g	1.8 mm		
203mm	179 g	1.8 mm		
220mm	208 g	2.0 mm		



RS05B-E

Hub/Brake Compatibility : Centerlock Disc				
Rotor Size	Weight	Rotor Thickness		
160mm	132 g	1.8 mm		
180mm	167 g	1.8 mm		
203mm	192 g	1.8 mm		
220mm	222 g	2.0 mm		

Brake Rotors

Sport Disc Brake Rotors

RS04A



Hub/Brake Compatib	Hub/Brake Compatibility : 6-Bolt Disc					
Rotor Size	Weight	Rotor Thickness				
140mm	109 g	1.8 mm				
160mm	127 g	1.8 mm				
180mm	151 g / 190 g	1.8 & 2.3 mm				
203mm	192 g / 239 g	1.8 & 2.3 mm				
220mm	226 g / 227 g	2.0 & 2.3 mm				



RS04B

Hub/Brake Compatibility : Centerlock Disc				
Rotor Size	Weight	Rotor Thickness		
140mm	131 g	1.8 mm		
160mm	148 g	1.8 mm		
180mm	172 g	1.8 mm		
203mm	213 g	1.8 mm		
220mm	246 g	2.0 mm		

Brake Rotor Accessories

CCR081AB CCR082AB



Specification:


- ▶ Color: Black
- ▶ Centerlock Rotor Lockring Inner Type
- ▶ Compatibility: 9mm 12mm Axles
- ▶ Material: Alloy



Specification:

- ▶ Color: Black
- ▶ Centerlock Rotor Lockring Outer Type
- ▶ Compatibility: 15mm 20mm Axles
- ► Material: Alloy





Adapter	Accessories	Usage
D14.4	AM-2220-001 (M6*27L) Bolt	1
PM-1 PM-4 PM-7	AM-2220-002 (M6*32L) Bolt	1
1 1111 7	CCC001ABB Washer	2
PM-3 PM-6	AM-2220-000 M6*19L	4

Adapters


IS - PM				
Fork Frame Rotor Size	F	R		
140	IS-8	IS-6		
160	IS-6	IS-7		
180	IS-7	IS-4		
203	IS-4	IS-3		

Note: "IS" Adapter set including Adapter *1 + AM-2220-000 (M6 *19L) 4 screws

PM - PM						
Fork Frame	Rotor Size	ø140	ø160	ø180	ø203	ø220
4"	Front Fork	DM	PM-1 (AF-1006)	-	-	-
140	Rear Fork	DM	PM-1 (AF-1006)	-	-	-
6"	Front Fork	-	DM	PM-1 (AF-1006)	PM-3 (AF-1007)	-
160	Rear Fork	-	DM	PM-1 (AF-1006)	PM-3 (AF-1007)	-
8"	Front Fork	-	-	DM	PM-4 (AF-1017)	PM-6 (AF-1018)
180	Rear Fork	1	-	DM	PM-4 (AF-1017)	PM-6 (AF-1018)
10"	Front Fork	-	-	-	DM	PM-7 (AF-1019)
203	Rear Fork	-	-	-	DM	PM-7 (AF-1019)

Adapters






FM - PM				
Rotor Size ø140 ø160				
4"	Front Fork	FP1	FP 1-1	
140	Rear Fork	FP 2	FP 2-1	



Adapter Model	Spec	Accessories	Usage	Note
FF 1	CM-2220-002 (M5*13L) Bolt	2	For calilper	
FF-1	F140/F160	AM-2001 (M5*14.7L) Bolt	2	For Front Fork
FF-2	R160	CM-2220-002 (M5*13L) Bolt	2	For calilper
FD1 / FD1 1	F140	AM-2220-002 (M6*18L) Bolt	2	For calilper
FP1 / FP1-1	F140	C1400001 (M5*14L)Bolt	2	For Front Fork
FP2/FP2-1	R140 / R160	AM-2220-002 (M6*18L) Bolt	2	For calilper
		AM-2005 (M5*21.8L) Bolt		For Frame (15mm)
FF 0/FD0/FD0 1		AM-2002 (M5*27.8L) Bolt	,	For Frame (20mm)
FF-2/FP2/FP2-1		AM-2003 (M5*32.8L) Bolt	2	For Frame (25mm)
		AM-2004 (M5*37.8L) Bolt		For Frame (30mm)

SEZ For Internal Routing & Accessories After Hose Cut

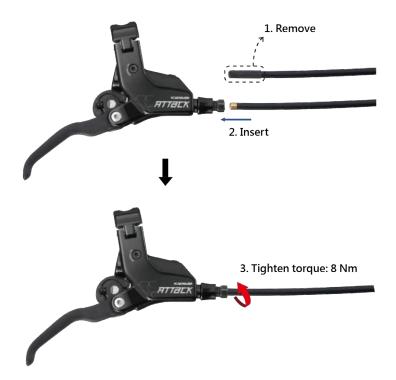


Accessories for hose fitting(after hose cutting)

Н	lose Type	Barb	Bushing	Compression nut
	SEZ	SM-B003	CC777	CM-2006-M
(Standard	CF-6001	CC777	CM-2006-M

- *CCC777 = Jagwire #HFA505
- *CF-6001 is compatiable with Jagwire #HFA309 barb
- *CM-2006-M is compatialbe with Jagwire #HFA403
- *SM-B003 is disposable barb, once used, must be replaced

SEZ Hose Fitting

- ▶ Apply to lever side
- ▶ Small plug, easy internal wiring
- ▶ 3 Step easy assembly



Standard Hose Fitting Parts After Hose Cut





Manufacturing Excellence

Riderever as an ISO 9001/TS-16949 company we have an unyielding commitment to quality.

Fully committed to process improvement, our experienced engineering staff always looking for ways to enhance quality, reduce errors and increase customer satisfaction. By applying Toyota Production System (TPS), everyone in the company continued to improve the everyday work. Our Balanced blend of automation and manual processes helps us manage flow and volume, resulting in unsurpassed quality and efficiency.

Environment & Community

Recognizing our vital role as responsible global citizens, we strive to produce products that meet the exacting requirements of government agencies for performance, safety and environmental impact. Our primary control system products are CPSIA, Proposition 65 and CEN certified.

Warranty Policy

EXTENT OF LIMITED WARRANTY

Riderever warrants its products to be free from defects in materials or workmanship for a period of two years after original purchase. This warranty only applies to the original owner and is not transferable. Claims under this warranty must be made through the retailer where the bicycles or RIDEREVER product was purchased. Original proof of purchase is required. Complete product warranty information is available by product manual. Or a copy may be requested via e-mail.

GLOBAL OFFICE

RIDEREVER HEAD OFFICE

(OEM/Aftermarket Sales & Manufacturing) No. 55, Alley 121, Lane 175, Kousheng Rd. Changhua City, Taiwan Ph: +886.4.7323090 Fx: +886.4.732.1824 RService@riderever.com.tw

RIDEREVER EUROPE

(OEM)

Klein Frankrijkstraat 24, 9600 Ronse, Belgium Ph: +32.55.30.41.65 Fx: +32.55.30.42.65 service@rever-europe.com

RIDFREVER CHINA

(OEM)

1456 Honghu Rd, Kunshan Economic& Technical Development Zone, Jiangsu Province, China Ph: +86.512.5016.5059 Fx: +86.512.5016.5060

